CALYPSO SINGLE LEVER

ASSEMBLY INSTRUCTIONS - PLEASE KEEP FOR FUTURE REFERENCE



SAFETY AND CARE ADVICE

Important - Please read these instructions fully before starting assembly

- Check you have all the components and tools listed on pages 2 and 3.
- Remove all fittings from the plastic bags and separate them into their groups.
- Keep children and animals away from the work area, small parts could choke if swallowed.
- Make sure you have enough space to layout the parts before starting.

- Do not stand or put weight on the product during assembly, this could cause damage.
- Assemble the item as close to its final position (in the same room) as possible.
- Assemble on a soft level surface to avoid damaging the unit or your floor.
- Parts of the assembly will be easier with 2 people.



• We do not recommend the use of power drill/drivers for inserting screws,

as this could damage the unit. Only use hand screwdrivers.

• Dispose of all packaging carefully and responsibly.

Care and maintenance

- Only clean using a damp cloth and mild detergent, do no use bleach or abrasive cleaners.
- From time to time check that there are no loose screws on this unit.
- · Do not stand on the chair.
- Do not use this chair as step ladder.
- This product should not be discarded with household


waste. Take to your local authority waste disposal centre.

Handy Hints


- Assemble all parts and bolts loosely during assembly, only once the product is complete should you fully tighten the bolts.
- Regularly check and ensure that all bolts and fittings are tightend properly.

COMPONENTS - FITTINGS


PLEASE CHECK YOU HAVE ALL THE PARTS LISTED BELOWS



A. KEY



B. M8x30 x2




C. Washer x2



D. BAG


COMPONENTS - PARTS

PLEASE CHECK YOU HAVE ALL THE PARTS LISTED BELOW

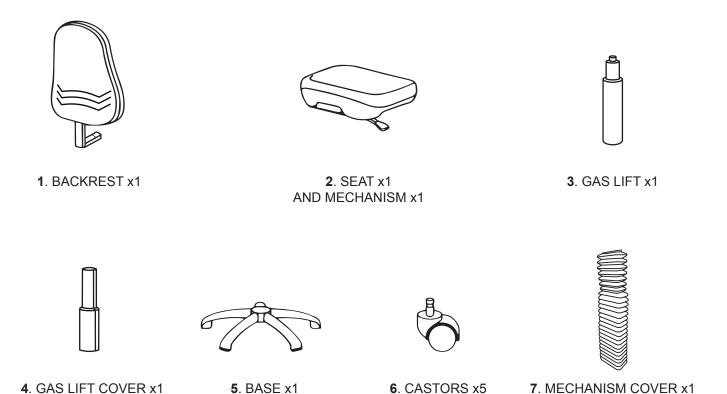

ASSEMBLY INSTRUCTIONS

STEP 1

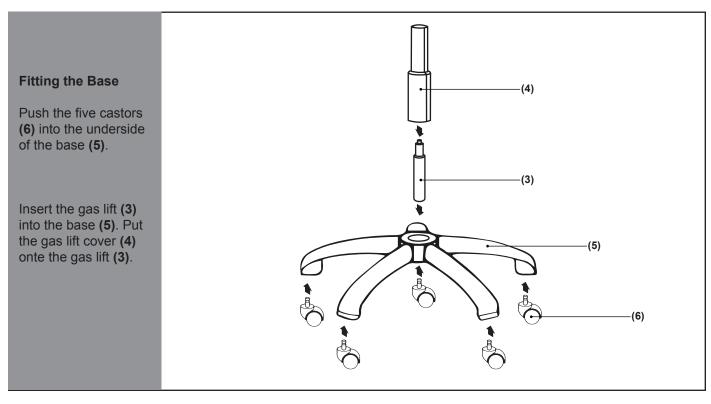


ASSEMBLY INSTRUCTIONS

STEP 2

Fitting the Seat

Carefully locate the seat (2) onto the base unit.

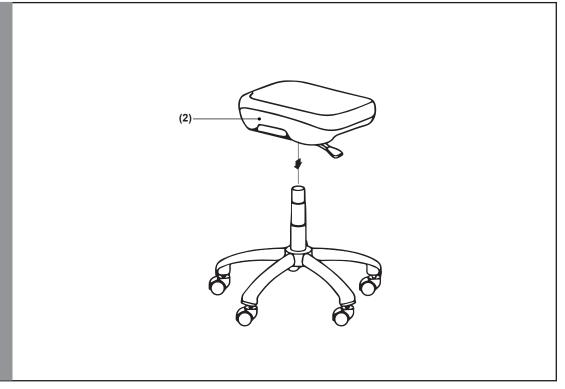

STEP 3

Fitting the Backrest

Slide the mechanism cover (7) into the backrest (1).

Use bolts (B) and washer (C) to fix the the backrest (1) into the base unit.

